

姿図




品 番	MCL009-3(B/W)
光 源	LED
定格光束	741lm
1/2 照度角	78°
ビーム角	-

器具効率 100%			保守率 1.0
-----------	--	--	---------

照明率表

天井	70%						50%						30%						0%
壁	50%		30%		10%		50%		30%		10%		50%		30%		10%		0%
床	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	0%
0.6	0.35	0.33	0.27	0.26	0.21	0.21	0.29	0.28	0.23	0.22	0.19	0.18	0.24	0.24	0.19	0.19	0.16	0.16	0.11
0.8	0.43	0.41	0.35	0.33	0.29	0.28	0.36	0.35	0.29	0.29	0.25	0.24	0.30	0.29	0.25	0.24	0.21	0.21	0.14
1.0	0.50	0.47	0.41	0.39	0.35	0.34	0.42	0.40	0.35	0.34	0.30	0.29	0.34	0.33	0.29	0.28	0.25	0.25	0.17
1.25	0.57	0.52	0.48	0.45	0.41	0.40	0.47	0.45	0.41	0.39	0.36	0.34	0.39	0.37	0.34	0.33	0.30	0.29	0.20
1.5	0.62	0.57	0.54	0.50	0.47	0.45	0.52	0.48	0.45	0.43	0.40	0.39	0.42	0.41	0.38	0.36	0.34	0.33	0.23
2.0	0.70	0.63	0.62	0.57	0.56	0.52	0.58	0.54	0.52	0.49	0.47	0.45	0.48	0.45	0.43	0.42	0.40	0.38	0.28
2.5	0.76	0.68	0.68	0.62	0.62	0.57	0.63	0.58	0.57	0.54	0.53	0.50	0.51	0.49	0.47	0.45	0.44	0.42	0.30
3.0	0.80	0.71	0.73	0.66	0.67	0.61	0.66	0.61	0.61	0.57	0.57	0.53	0.54	0.51	0.50	0.48	0.47	0.45	0.33
4.0	0.85	0.75	0.79	0.71	0.74	0.67	0.70	0.64	0.66	0.61	0.62	0.58	0.57	0.54	0.54	0.52	0.51	0.49	0.36
5.0	0.89	0.78	0.84	0.74	0.79	0.71	0.73	0.67	0.70	0.64	0.66	0.61	0.60	0.57	0.57	0.54	0.55	0.52	0.38
10.0	0.97	0.84	0.94	0.82	0.91	0.80	0.80	0.73	0.78	0.71	0.76	0.69	0.65	0.62	0.64	0.60	0.62	0.59	0.44

配光曲線

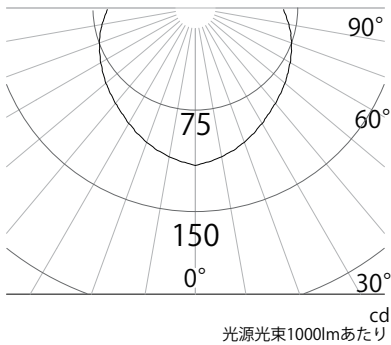

水平面照度

