

姿図




品 番	MCL010-5(B/W)
光 源	LED
定格光束	1206lm
1/2 照度角	80°
ビーム角	-

器具効率 100%			保守率 1.0
-----------	--	--	---------

照明率表

天井	70%						50%						30%						0%
	50%		30%		10%		50%		30%		10%		50%		30%		10%		0%
壁	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	0%
床	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	0%
0.6	0.34	0.33	0.26	0.26	0.21	0.21	0.29	0.28	0.22	0.22	0.18	0.18	0.24	0.23	0.19	0.18	0.15	0.15	0.10
0.8	0.42	0.40	0.34	0.33	0.28	0.27	0.36	0.34	0.29	0.28	0.24	0.24	0.29	0.28	0.24	0.24	0.20	0.20	0.13
1.0	0.49	0.46	0.41	0.39	0.34	0.33	0.41	0.39	0.34	0.33	0.29	0.29	0.34	0.32	0.29	0.28	0.24	0.24	0.16
1.25	0.56	0.52	0.47	0.45	0.41	0.39	0.47	0.44	0.40	0.38	0.35	0.34	0.38	0.37	0.33	0.32	0.29	0.29	0.20
1.5	0.61	0.56	0.53	0.50	0.46	0.44	0.51	0.48	0.45	0.42	0.39	0.38	0.42	0.40	0.37	0.36	0.33	0.32	0.22
2.0	0.70	0.63	0.62	0.57	0.55	0.52	0.58	0.54	0.52	0.49	0.47	0.45	0.47	0.45	0.43	0.41	0.39	0.38	0.27
2.5	0.75	0.67	0.68	0.62	0.62	0.57	0.62	0.57	0.57	0.53	0.52	0.49	0.50	0.48	0.46	0.45	0.43	0.42	0.30
3.0	0.79	0.70	0.72	0.65	0.66	0.61	0.65	0.60	0.60	0.56	0.56	0.53	0.53	0.50	0.49	0.47	0.46	0.44	0.32
4.0	0.85	0.75	0.79	0.70	0.74	0.67	0.70	0.64	0.65	0.61	0.62	0.57	0.57	0.54	0.54	0.51	0.51	0.49	0.35
5.0	0.88	0.77	0.83	0.74	0.79	0.70	0.73	0.66	0.69	0.63	0.66	0.61	0.59	0.56	0.56	0.54	0.54	0.52	0.38
10.0	0.97	0.84	0.94	0.81	0.91	0.79	0.80	0.72	0.77	0.70	0.75	0.69	0.65	0.61	0.63	0.60	0.61	0.58	0.43

配光曲線

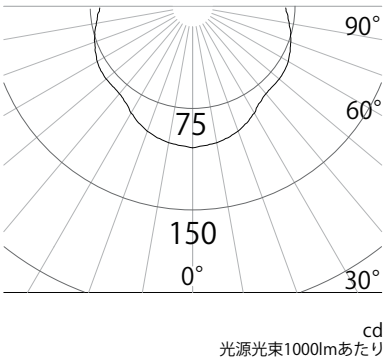

水平面照度

