

姿図




品 番	MBK006(B/L/Z)
光 源	LED
定格光束	230lm
1/2 照度角	26°
ビーム角	-

器具効率 100%	上方光束 0%	下方光束 100%	保守率 1.0
-----------	---------	-----------	---------

照明率表

天井	70%						50%						30%						0%
壁	50%		30%		10%		50%		30%		10%		50%		30%		10%		0%
床	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	0%
0.6	0.78	0.75	0.73	0.71	0.70	0.69	0.77	0.74	0.73	0.71	0.69	0.69	0.76	0.73	0.72	0.71	0.69	0.68	0.67
0.8	0.86	0.81	0.81	0.78	0.77	0.75	0.84	0.80	0.80	0.77	0.76	0.75	0.83	0.80	0.79	0.77	0.76	0.75	0.74
1.0	0.91	0.85	0.86	0.82	0.82	0.80	0.89	0.84	0.85	0.82	0.81	0.79	0.87	0.83	0.83	0.81	0.80	0.79	0.78
1.25	0.95	0.88	0.90	0.85	0.86	0.82	0.92	0.86	0.87	0.84	0.84	0.82	0.89	0.85	0.85	0.83	0.83	0.81	0.79
1.5	0.97	0.89	0.92	0.86	0.88	0.83	0.93	0.88	0.89	0.85	0.86	0.83	0.90	0.86	0.87	0.84	0.84	0.82	0.80
2.0	1.02	0.92	0.97	0.90	0.93	0.87	0.98	0.91	0.94	0.88	0.91	0.87	0.94	0.89	0.91	0.87	0.88	0.86	0.84
2.5	1.05	0.94	1.01	0.92	0.97	0.90	1.00	0.93	0.97	0.91	0.94	0.89	0.96	0.91	0.93	0.89	0.91	0.88	0.86
3.0	1.08	0.96	1.04	0.94	1.00	0.92	1.02	0.94	0.99	0.92	0.97	0.91	0.97	0.92	0.95	0.91	0.93	0.90	0.87
4.0	1.13	0.99	1.10	0.98	1.07	0.97	1.07	0.97	1.04	0.96	1.02	0.95	1.01	0.96	0.99	0.95	0.98	0.94	0.92
5.0	1.14	1.00	1.11	0.99	1.09	0.98	1.07	0.98	1.06	0.97	1.04	0.96	1.02	0.96	1.00	0.95	0.99	0.95	0.92
10.0	1.19	1.03	1.18	1.02	1.17	1.02	1.11	1.01	1.11	1.00	1.10	1.00	1.05	0.99	1.04	0.98	1.04	0.98	0.95

配光曲線

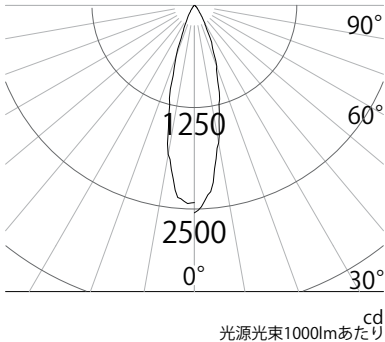

水平面照度

