


姿図

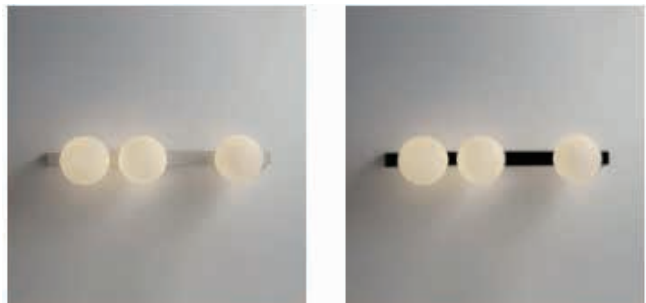


品 番	MBK038-3(B/W)
光 源	LED
定格光束	890lm
1/2 照度角	78°
ビーム角	-

器具効率 100%			保守率 1.0
-----------	--	--	---------

照明率表

天井	70%						50%						30%						0%
	50%		30%		10%		50%		30%		10%		50%		30%		10%		0%
壁	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	0%
床	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	0%
0.6	0.34	0.32	0.25	0.25	0.20	0.19	0.29	0.28	0.22	0.22	0.17	0.17	0.25	0.25	0.20	0.19	0.15	0.15	0.11
0.8	0.42	0.40	0.33	0.32	0.26	0.26	0.36	0.35	0.29	0.28	0.23	0.23	0.31	0.30	0.25	0.25	0.21	0.20	0.15
1.0	0.49	0.46	0.39	0.38	0.32	0.31	0.42	0.40	0.35	0.33	0.29	0.28	0.36	0.35	0.30	0.29	0.25	0.25	0.19
1.25	0.56	0.52	0.46	0.44	0.39	0.38	0.48	0.45	0.41	0.39	0.35	0.34	0.41	0.39	0.35	0.34	0.30	0.30	0.22
1.5	0.61	0.56	0.52	0.49	0.45	0.43	0.53	0.50	0.45	0.43	0.39	0.38	0.45	0.43	0.39	0.38	0.34	0.34	0.26
2.0	0.70	0.63	0.61	0.56	0.54	0.50	0.60	0.56	0.53	0.50	0.47	0.45	0.51	0.49	0.46	0.44	0.41	0.40	0.31
2.5	0.76	0.68	0.67	0.61	0.61	0.56	0.65	0.60	0.58	0.55	0.53	0.50	0.55	0.52	0.50	0.48	0.46	0.45	0.35
3.0	0.80	0.71	0.72	0.65	0.66	0.60	0.69	0.63	0.63	0.58	0.58	0.54	0.58	0.55	0.54	0.52	0.50	0.48	0.38
4.0	0.86	0.76	0.79	0.71	0.74	0.66	0.74	0.67	0.69	0.63	0.64	0.60	0.63	0.59	0.59	0.56	0.55	0.53	0.43
5.0	0.90	0.79	0.84	0.75	0.79	0.71	0.77	0.70	0.73	0.67	0.69	0.64	0.66	0.62	0.62	0.59	0.59	0.57	0.46
10.0	1.00	0.86	0.96	0.84	0.93	0.81	0.85	0.77	0.83	0.75	0.80	0.73	0.73	0.69	0.71	0.67	0.69	0.65	0.53

配光曲線

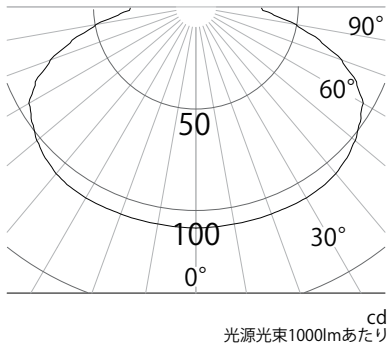

水平面照度

