

姿図




品 番	MPN035(B/W)-2/MPN035D(B/W)-2
光 源	LED
定格光束	539lm
1/2 照度角	73°
ビーム角	

器具効率 100%			保守率 1.0
-----------	--	--	---------

照明率表

天井	70%						50%						30%						0%
壁	50%		30%		10%		50%		30%		10%		50%		30%		10%		0%
床	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	0%
0.6	0.33	0.32	0.26	0.25	0.20	0.20	0.29	0.28	0.22	0.22	0.17	0.17	0.24	0.23	0.19	0.18	0.15	0.15	0.10
0.8	0.42	0.39	0.33	0.32	0.27	0.26	0.35	0.34	0.28	0.28	0.23	0.23	0.29	0.28	0.24	0.23	0.20	0.20	0.13
1.0	0.48	0.45	0.39	0.38	0.33	0.32	0.41	0.39	0.34	0.33	0.28	0.28	0.34	0.33	0.28	0.28	0.24	0.24	0.17
1.25	0.55	0.51	0.46	0.44	0.39	0.38	0.46	0.44	0.39	0.38	0.34	0.33	0.38	0.37	0.33	0.32	0.29	0.28	0.20
1.5	0.60	0.55	0.52	0.48	0.45	0.43	0.51	0.48	0.44	0.42	0.39	0.37	0.42	0.40	0.37	0.36	0.32	0.32	0.23
2.0	0.69	0.62	0.60	0.56	0.54	0.50	0.57	0.53	0.51	0.48	0.46	0.44	0.47	0.45	0.43	0.41	0.39	0.38	0.27
2.5	0.74	0.66	0.66	0.61	0.60	0.55	0.62	0.57	0.56	0.53	0.51	0.48	0.51	0.49	0.47	0.45	0.43	0.42	0.30
3.0	0.78	0.70	0.71	0.64	0.65	0.60	0.65	0.60	0.60	0.56	0.55	0.52	0.54	0.51	0.50	0.48	0.46	0.45	0.33
4.0	0.84	0.74	0.78	0.70	0.72	0.65	0.70	0.64	0.65	0.60	0.61	0.57	0.58	0.55	0.54	0.52	0.51	0.49	0.37
5.0	0.88	0.77	0.82	0.73	0.77	0.69	0.73	0.67	0.69	0.64	0.65	0.61	0.60	0.57	0.57	0.55	0.55	0.52	0.39
10.0	0.97	0.84	0.93	0.81	0.90	0.79	0.81	0.73	0.78	0.71	0.76	0.69	0.67	0.63	0.65	0.61	0.63	0.60	0.46

配光曲線

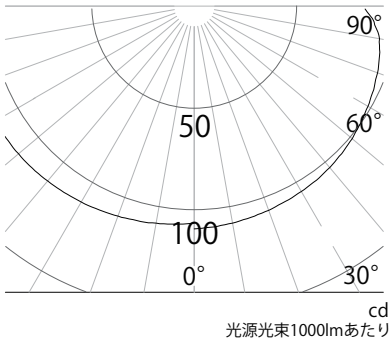

水平面照度

